

21 Industrial &amp; Floodlights&gt;The LED Park Light Die cast

70112/B/C



LED outdoor light for poles 3m and higher. Ideal for parks, parkings, playgrounds. Post Diameter 60mm.

Complete with 2400mA driver.

Complies with standard EN60598-1 and any other specific standards.




## Downloads



## Dimensions



## Gallery



## Physical Specification

Item Group

21 Industrial &amp; Floodlights

Family

The LED Park Light Die cast

Order Code

70112/B/C

Colour

Black

Material

Die Cast

Shape

Circular

Height

530mm

Diameter	450mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	Built In
------	----------

## Fitting + Driver


Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	75W
IP Rating	IP66
Light Source	LED built in
Dimmable	No
Cable Length	150cm
F Mark	

## Fitting

Input Type	Constant Current
Input Current	2400mA
Voltage	30V
Power(Watts)	72W
IP Rating	IP66
Light Source	LED built in
LED Brand	Seoul

## Gear

Gear Type	Led Driver
-----------	------------

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	52,8-134,4W
Power Factor	0,9
Constant Current	Yes
Output	2400mA
Voltage Range	22-56V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Sosen


## Illumination Data

Colour Temperature	4000K
Lumen Output	9000lm
Light Efficiency	120lm/W
CRI	80
Illumination Diagram	

## Packing Info

Pcs/Carton	1
Barcode	5291889068327
HS Code	9405409900

## Energy Label

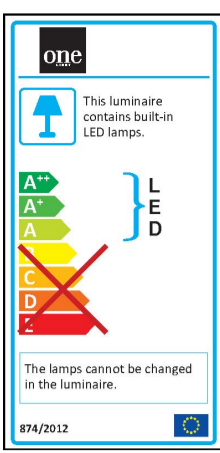

## Certification & Warranty

Warranty

5 Years

Average Lifetime

50000hours

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

