

New 2023 Edition 2>Industrial & Floodlights

70114/B/W



LED street light with SMD LED. High lumen output ideal for replacement of old HPS and mercury street lighting fittings.

Post Diameter 60mm.

Complete with 950mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

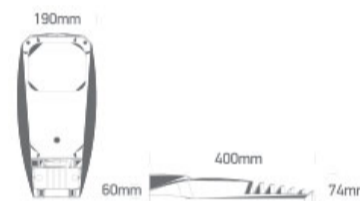

Accessories



050326

Physical Specification

Item Group

New 2023 Edition 2

Family

Industrial & Floodlights

Order Code

70114/B/W

Colour

Black

Material

Plastic

Shape



Rectangular

Length	400mm
Width	190mm
Height	74mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In
------	----------

Fitting + Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	50W
IP Rating	IP66
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	

Fitting

Input Type	Constant Current
Input Current	950mA
Voltage	50V
Power(Watts)	47,5W
IP Rating	IP66
Light Source	LED built in
LED Type	SMD 2835

LED Brand

Smalite

Завантажено з mamadecor.ua

LED Number

64

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

23,75-53,2W

Power Factor

0,9

Constant Current

Yes

950mA

25-56V

IP Rating

IP67

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Connector

Brand

DONE

Illumination Data

Colour Temperature

3000K

Lumen Output

6800lm

Light Efficiency

136lm/W

CRI

80

Beam Angle

140°x80°

Illumination Diagram



Packing Info

Pcs/Carton

6

Barcode

5291889075165

Certification & Warranty

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

