

New 2023 Edition 2>Industrial & Floodlights

70116C/G/C



LED street light with SMD LED. High lumen output ideal for replacement of old HPS and mercury street lighting fittings.

Post Diameter 60mm.

Complete with 1020mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

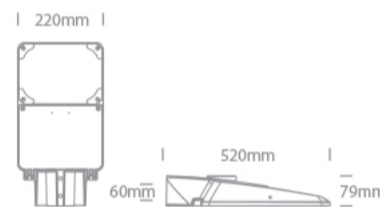

Accessories



050326

Physical Specification

Item Group

New 2023 Edition 2

Family

Industrial & Floodlights

Order Code

70116C/G/C

Colour

Grey

Material



Aluminium + Glass

Shape

Rectangular

Length	520mm
Width	220mm
Height	79mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No
IK Rating	9

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	120W
IP Rating	IP66
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1020mA
Voltage	112V
Power(Watts)	114,24W
IP Rating	IP66
Light Source	LED built in
LED Type	SMD 3030

LED Brand

Seoul

Завантажено з mamadecor.ua

LED Number

126

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

109,14-218,28W

Power Factor

0,97

Constant Current

Yes

Output

1020mA

Voltage Range

107-214V

IP Rating

IP67

Safety Class



Dimmable

No

Housing Material

Metal

Output Terminal

Connector

Brand

MOSO

Illumination Data

Colour Temperature

4000K

Lumen Output

16800lm

Light Efficiency

140lm/W

CRI

80

Beam Angle

140°x80°

Illumination Diagram



Packing Info

Pcs/Carton

1

Barcode

5291889074243

[Завантажено з mamadecor.ua](http://mamadecor.ua)

HS Code

9405413990

Certification & Warranty

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

