

13 Wall & Ceiling LED>Outdoor Slim Range Up & down beam

67376/AN/W

2x3W, IP54, SMD 2835, Outdoor Slim Range Up & down beam.


Complies with standard EN60598-1 and any other specific standards.



Downloads



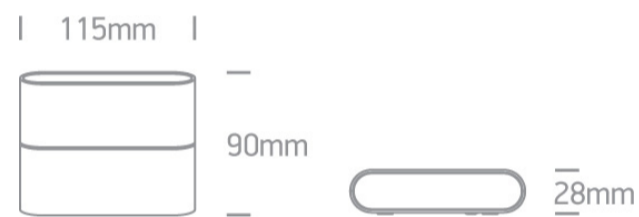

Dimensions



Physical Specification


Item Group	13 Wall & Ceiling LED
Family	Outdoor Slim Range Up & down beam
Order Code	67376/AN/W
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	115mm
Width	90mm
Height	28mm
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes

Electrical Characteristics


Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	2x3W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	16V
Power(Watts)	5,6W
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Edison

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	2,9-6,1W
Power Factor	0,5

Constant Current	Yes
350mA	8,5-17,5V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Output Terminal	Cable
Brand	Eaglerise

Illumination Data

Colour Temperature	3000K
Lumen Output	2x210lm
Light Efficiency	70lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	9,5cm
Box Width	5,2cm
Box Height	15cm
Box Weight	0.425kg
Pcs/Carton	24
Barcode	5291889043638
HS Code	9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

