

13 Wall & Ceiling LED>Outdoor Slim Oval Range Up & down beam

67378/W/W

2x3W LED wall light, IP54, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



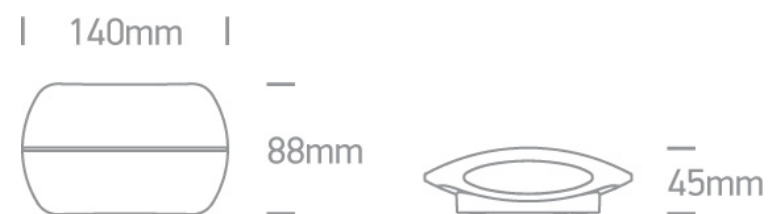

Dimensions



Physical Specification


Item Group	13 Wall & Ceiling LED
Family	Outdoor Slim Oval Range Up & down beam
Order Code	67378/W/W
Colour	White
Material	Die Cast
Shape	Rectangular
Length	140mm
Width	88mm
Height	45mm
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes

Electrical Characteristics


Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	2x3W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	16V
Power(Watts)	5,6W
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 5630
LED Brand	Osram

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	2,9-6,1W
Power Factor	0,5

Constant Current	Yes
350mA	8,5-17,5V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Output Terminal	Cable
Brand	Eaglerise

Illumination Data

Colour Temperature	3000K
Lumen Output	2x210lm
Light Efficiency	70lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	9,5cm
Box Width	5,2cm
Box Height	15cm
Box Weight	0.429kg
Pcs/Carton	24
Barcode	5291889043669
HS Code	9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

