

21 Industrial & Floodlights>The Classic LED Floodlights Die cast

7032/AN/C



150W Classic LED floodlight, IP65.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Classic LED Floodlights Die cast
Order Code	7032/AN/C
Colour	Anthracite
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	450mm
Width	260mm
Height	185mm
Surface Ceiling	Yes
Surface Wall	Yes

Surface Floor/Ground

Yes

Завантажено з mamadecor.ua

Outdoor

Yes

Adjustable

1 Direction

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

150W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

4500mA

Voltage

33V

Power(Watts)

148,5W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Epistar


Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	121,5-162W
Power Factor	0,95
Constant Current	Yes
Output	4500mA
Voltage Range	27-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell


Illumination Data

Colour Temperature	4000K
Lumen Output	12000lm
Light Efficiency	80lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	8,6Kg
Pcs/Carton	1
Barcode	5291889032731
HS Code	9405409900

Energy Label

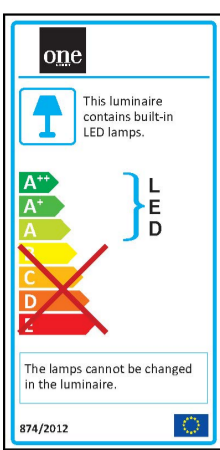

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

