

21 Industrial &amp; Floodlights&gt;The COB LED Slim Line Die cast

7034B/G/C



50W COB LED Slim floodlight, IP65.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions



## Physical Specification

Item Group	21 Industrial & Floodlights
Family	The COB LED Slim Line Die cast
Order Code	7034B/G/C
Colour	Grey
Material	Die Cast
Shape	Rectangular
Length	250mm
Width	200mm
Height	120mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes

Outdoor

Yes

Завантажено з mamadecor.ua

Adjustable

1 Direction

## Electrical Characteristics

Gear

Built In

### Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

50W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

Cable Length

100cm

F Mark



### Fitting

Input Type

Constant Current

Input Current

1400mA

Voltage

34V

Power(Watts)

47,6W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Epistar


Gear

Gear Type

Led Driver

Input Voltage

100-240V


50 Hz	Yes
60 Hz	Yes
Power(Watts)	31-50W
Power Factor	0,9
Constant Current	Yes
1400mA	22-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell

#### Illumination Data

Colour Temperature	4000K
Lumen Output	4050lm
Light Efficiency	81lm/W
CRI	75
Beam Angle	130°
Illumination Diagram	

#### Packing Info

Box Length	20,5cm
Box Width	15,5cm
Box Height	28cm
Box Weight	2,2Kg
Pcs/Carton	10
Barcode	5291889034278
HS Code	9405409900

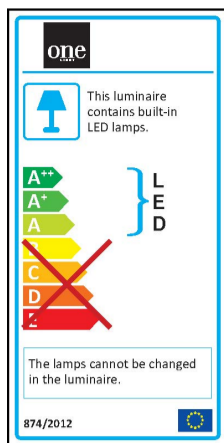

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

