

INSTALLATION MANUAL

9011L, 9021L, 9026L

ecolamp



Key Features:

Environment friendly and mercury free | up to 90% energy saving.
Lifetime up to 35000 hours | Anti-UV and IR | Non-flickering.
Super Brightness LED used | Direct retrofit and replacement friendly.
Excellent thermal dissipation and optical solution.
CE and RoHS standard compliant.


one
LIGHT

SPECIFICATION

Item code	Power (W)	Luminous Flux (lm)	Colour Temperature (K)	Operating Voltage (V)	Frequency (Hz)	LED Type	Beam Angle	Length (mm)
9011L/D	11	1000	6000	100-240V AC	50/60	SMD 2835	180°	600
9011L/C	11	1000	4000	100-240V AC	50/60	SMD 2835	180°	600
9011L/W	11	950	3000	100-240V AC	50/60	SMD 2835	180°	600
9021L/D	21	1900	6000	100-240V AC	50/60	SMD 2835	180°	1200
9021L/C	21	1900	4000	100-240V AC	50/60	SMD 2835	180°	1200
9021L/W	21	1800	3000	100-240V AC	50/60	SMD 2835	180°	1200
9026L/D	25	2300	6000	100-240V AC	50/60	SMD 2835	180°	1500
9026L/C	25	2300	4000	100-240V AC	50/60	SMD 2835	180°	1500
9026L/W	25	2200	3000	100-240V AC	50/60	SMD 2835	180°	1500

INSTALLATION DIAGRAM

AC Input 100-240V

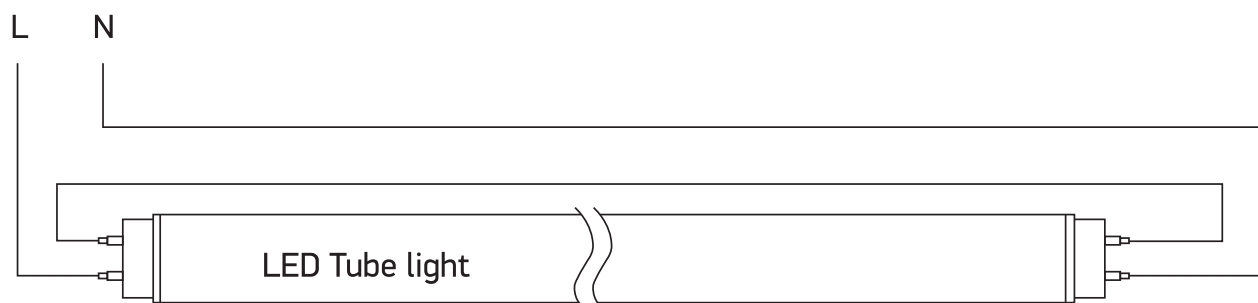

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.