



CONTONE®
EL, round/square, adjustable, TRIAC

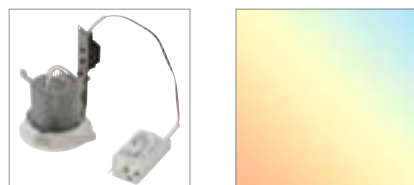


- Premium LED with CRI>90
- Colour of light changed by dimming

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 16W
Material: Aluminium
Dimmable: Triac C, Triac L

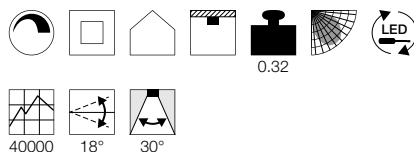

Dimensioned drawing

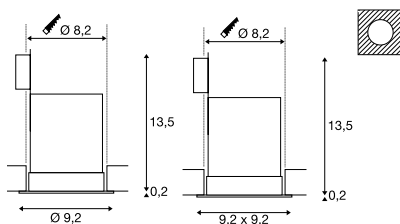

Note


Material thickness, mounting surface: 25 mm max.

An application video about Dim to Warm can be found at <http://bit.ly/dim-to-warm>



Variant	Item no.
890lm 2000K-3000K CRI>90	
○ white	161271
890lm 2000K-3000K CRI>90	
□ white	161281


CONTONE®
EL, round/square, rigid, TRIAC

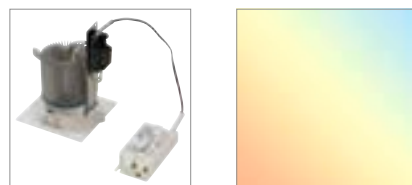


- Premium LED with CRI>90
- Colour of light changed by dimming

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 16W
Material: Aluminium
Dimmable: Triac C, Triac L

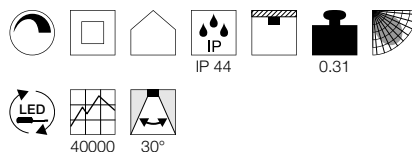

Dimensioned drawing

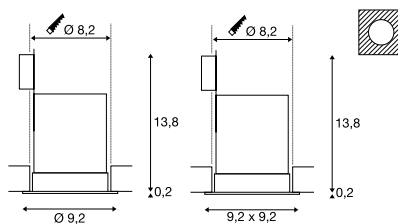

Note


Material thickness, mounting surface: 25 mm max.

An application video about Dim to Warm can be found at <http://bit.ly/dim-to-warm>



Variant	Item no.
890lm 2000K-3000K CRI>90	
○ white	161291
890lm 2000K-3000K CRI>90	
□ white	161301


DINGILO
EL, round, adjustable, TRIAC

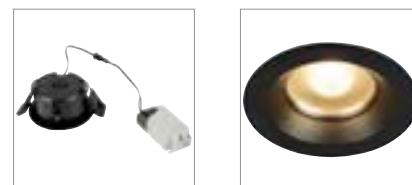


- Premium LED with CRI>90

Product details

100-277V ~50/60Hz | 200mA
Total consumption: 4.4W
Material: Aluminium / Plastic

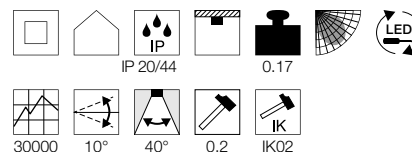

Dimensioned drawing



Note

Material thickness, mounting surface: 25 mm max.

An application video about Dim to Warm can be found at <http://bit.ly/dim-to-warm>

Variant	Item no.
330lm 2700K CRI>90	
■ matt black / matt black	1003036
330lm 2700K CRI>90	
■ matt white / matt black	1003037
330lm 3000K CRI>90	
■ matt black / matt black	1003038
330lm 3000K CRI>90	
■ matt white / matt black	1003039