



MEDO 40
EL, frameless




A-A++ Range A++-E



- Colour temperature (3000K/4000K) selectable using a switch

Product details

700mA | 18W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 13 cm

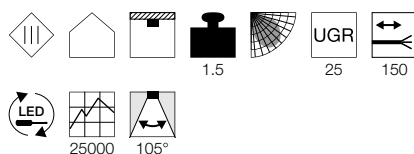

Dimensioned drawing



Note

Open cable end
Material thickness, mounting surface: 45 mm

Recommended accessories

- LED driver 700mA | 40W incl. strain relief
Item no. 464168
- LED driver 40W | 700mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002424

| Variant | Item no. |
|-----------------------------------|----------------|
| 3100/3300lm 3000/4000K CRI>80 | |
| □ white | 1001902 |

MEDO 60
EL, frameless




A-A++ Range A++-E




- Colour temperature (3000K/4000K) selectable using a switch

Product details

1000mA/1050mA | 28W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 16 cm

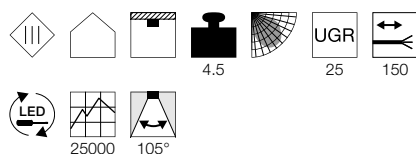

Dimensioned drawing

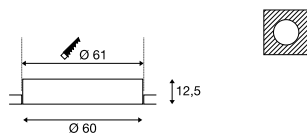

Note

Open cable end
Material thickness, mounting surface: 45 mm

Recommended accessories

- LED driver 60W | 1000mA | incl. strain relief
Item no. 1002422
- LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425
- LED driver 1000mA | 40W | TRIAC dimmable, incl. strain relief
Item no. 1001115

| Variant | Item no. |
|-----------------------------------|----------------|
| 4700/5000lm 3000/4000K CRI>80 | |
| □ white | 1001903 |

MEDO 90
EL, frameless




A-A++ Range A++-E




- Colour temperature (3000K/4000K) selectable using a switch

Product details

1000mA/1050mA | 36W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 21 cm

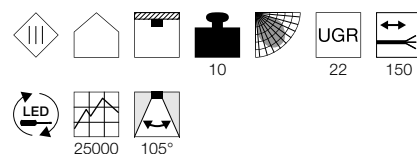

Dimensioned drawing

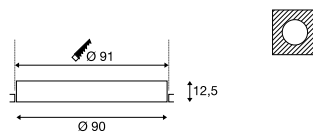

Note

Open cable end
Material thickness, mounting surface: 45 mm

Recommended accessories

- LED driver 60W | 1000mA | incl. strain relief
Item no. 1002422
- LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425
- LED driver 1000mA | 40W | TRIAC dimmable, incl. strain relief
Item no. 1001115

| Variant | Item no. |
|------------------------------------|----------------|
| 9550/10150lm 3000/4000K CRI>80 | |
| □ white | 1001904 |