



MEDO 90
EL, installation frame



A-A++ Range A++-E

LED INSIDE


NEW VARIANT



- Colour temperature (3000K/4000K) selectable using a switch

Product details

1000mA/1050mA | 36W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 21 cm

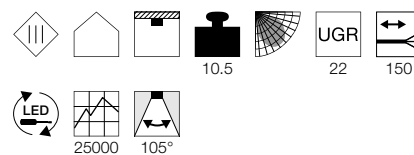

Dimensioned drawing



Note

Open cable end
Material thickness, mounting surface: 10-35 mm

Recommended accessories

- LED driver 60W | 1000mA | incl. strain relief
Item no. 1002422
- LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425
- LED driver 1000mA | 40W | TRIAC dimmable, incl. strain relief
Item no. 1001115

Variant	Item no.
9550/10150lm 3000/4000K CRI>80	
<input type="checkbox"/> white	1001908