


LED PANEL
620x620mm




- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

1050mA | 35W
Material: Aluminium / Polystyrene (PS)
Product dimensions: H: 0,9
Installation dimensions: D: 5 cm

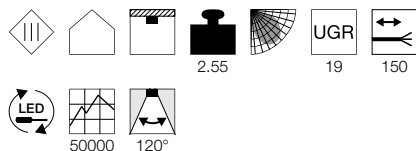

Dimensioned drawing



Note

Open cable end

Recommended accessories

- LED driver 1050mA | 40W Triac trailing edge dimmable
Item no. 464804
- LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425

Variant	Item no.
4000lm 3000K CRI>90 <input type="checkbox"/> white	1003073


LED PANEL
600x600mm




- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

1050mA | 35W
Material: Aluminium / Polystyrene (PS)
Product dimensions: H: 0.9 cm
Installation dimensions: D: 5 cm

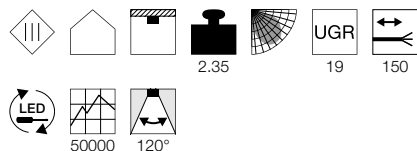

Dimensioned drawing



Note

Open cable end

Recommended accessories

- LED driver 1050mA | 40W Triac trailing edge dimmable
Item no. 464804
- LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425

Variant	Item no.
4000lm 3000K CRI>90 <input type="checkbox"/> white	1003083
4000lm 4000K CRI>90 <input type="checkbox"/> white	1003084


LED PANEL
300x120mm



- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

900mA | 31W
Material: Aluminium / Polystyrene (PS)
Product dimensions:
L: 119.5 cm W: 29.5 cm H: 0.9 cm
Installation dimensions: D: 5 cm

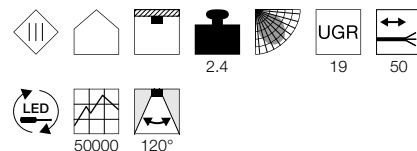

Dimensioned drawing

Note

Open cable end

Recommended accessories

- LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425

Variant	Item no.
3600lm 3000/4000K CRI>90 <input type="checkbox"/> white	1003075