


DASAR® 255
EL




- Panel: Stainless steel 316
- Asymmetrical reflector

Product details

220-240V ~50/60Hz 750mA
Total consumption: 34W
Material: Stainless steel 316 / Aluminium / Glass

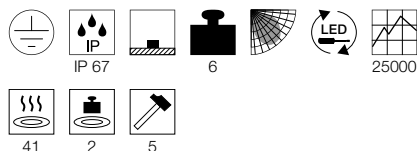

Dimensioned drawing



Note

Mounting pot incl.

Variant	Item no.
1620lm 4000K CRI>80 ■ stainless steel	229381
1620lm 3000K CRI>80 ■ stainless steel	229383


DASAR® 270
EL, asymmetrical



- Asymmetric light distribution

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Stainless Steel 316
Product dimensions: Ø: 27 cm H: 20.3 cm
Installation dimensions: Installation
Ø: 25 cm D: 19.9 cm

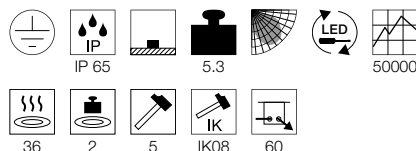

Note

Mounting pot incl.

Variant	Item no.
2000lm 3000K CRI>80 ■ matt black / brushed stainless steel	1002893
2100lm 4000K CRI>80 ■ matt black / brushed stainless steel	1002895


DASAR® 270
EL, symmetrical



- Symmetric light distribution
- Tilting lamp head

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Stainless Steel 316
Product dimensions: Ø: 27 cm H: 20.3 cm
Installation dimensions: Installation
Ø: 25 cm D: 19.9 cm

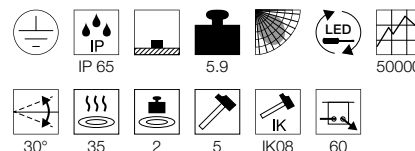

Note

Mounting pot incl.

Recommended accessories

- Honeycomb cover
Item no. 1002899

Variant	Item no.
2500lm 3000K CRI>80 ■ matt black / brushed stainless steel	1002897
2600lm 4000K CRI>80 ■ matt black / brushed stainless steel	1002898