

# INSTALLATION MANUAL

68004A


**ecolight**




**DARK LIGHT**



Concrete installation



Gypsum installation



350mA | 1W | IP54 | Aluminium | Recessed

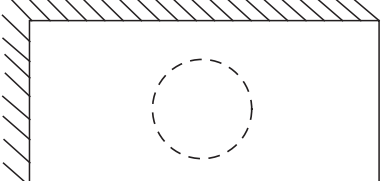
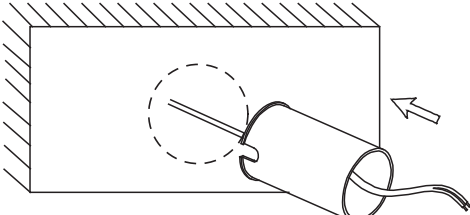
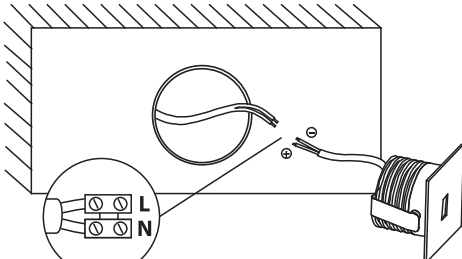
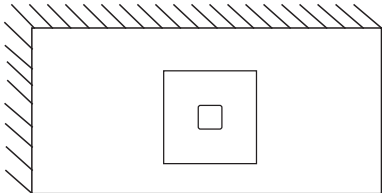
Requires 350mA driver.  
Supplied with box for concrete installation.

85 CRI

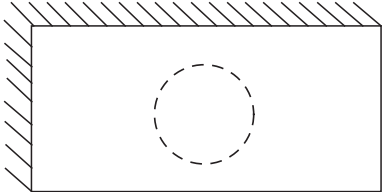
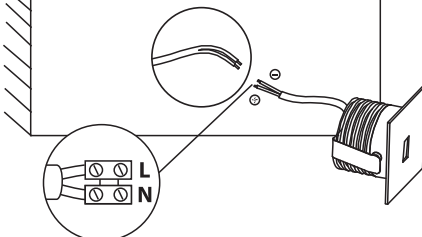
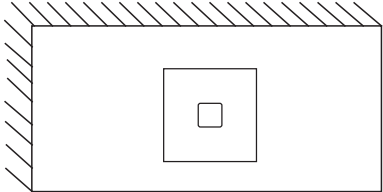
200cm

**one**  
LIGHT

## FOR CONCRETE INSTALLATION

<p><b>A</b></p>  <p>Hole required with diameter 36mm.</p>	<p><b>B</b></p>  <p>1. Insert cable through wall box 2. Insert wall box into the wall and secure with cement.</p>
<p><b>C</b></p>  <p>Connect and terminate wires to the terminal block connector.</p>	<p><b>D</b></p>  <p>Secure the fitting into the wall box.</p>

## FOR GYPSUM INSTALLATION

<p><b>A</b></p>  <p>Mark gypsum board and cut hole with diameter 33mm.</p>	<p><b>B</b></p>  <p>Connect and terminate wires to the terminal block connector.</p>	<p><b>C</b></p>  <p>Install provided kit for gypsum board and insert fitting into the board until the clips snap into place.</p>
---	--	---

### Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.