

21 Industrial & Floodlights>The Industrial LED Lights Die cast

7056A/C

LED industrial wall light with COB. High lumen output, IP65, for outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

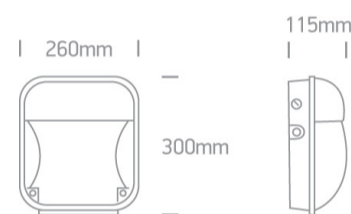

Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Industrial LED Lights Die cast
Order Code	7056A/C
Colour	Black
Material	Die Cast
Diffuser Material	PC
Shape	Rectangular
Length	260mm
Width	300mm
Height	115mm
Surface Wall	Yes
Indoor	Yes

Outdoor
Adjustable
IK Rating

Yes
No
10

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
F Mark

100-240V
Yes
Yes

50W
IP65
LED built in
No


Fitting

Input Type
Input Current
Voltage
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand

Constant Current
1400mA
35V
49W
IP65
LED built in
SMD
Febik

Gear

Gear Type
Input Voltage

Led Driver
100-240V

50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
1250mA
IP Rating
Safety Class

Yes

Yes

37,5-50W

0,9

Yes

30-40V

IP20



Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K

4000lm

80lm/W

80

120°



Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

28,8cm

16,2cm

30,8cm

2,9Kg

6

5291889040866

9405409900

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

