

PRODUCT DATASHEET

SF CIRCULAR 350 18 W 3000 K IP44 WT

SURFACE CIRCULAR 350 | Wall and ceiling luminaire with IP44



AREAS OF APPLICATION

- Corridors
- Stairways
- Bathrooms
- Foyers

PRODUCT BENEFITS

- High luminous efficacy
- Energy savings of up to 55 % compared to luminaires that use CFL
- Easy and quick installation
- Very homogenous light
- Clear cover protects the reflector against dust and contact
- 3 years guarantee

PRODUCT FEATURES

- Beam angle: 120°
- Type of protection: IP44
- Impact resistance: IK03
- Metal housing, PMMA cover
- Ambient temperature in operation: -20...+40 °C



TECHNICAL DATA

Electrical data

Nominal wattage	18.00 W
Operating mode	Integrated LED driver
Nominal voltage	220...240 V
Power factor λ	>0.5
Mains frequency	50/60 Hz
Max. no. of lum. on circuit break. B16 A	31
Max. no. of lum. on circuit break. C10 A	26
Max. no. of lum. on circuit break. C16 A	42
Inrush current	15.0 A
Total harmonic distortion	< 120 %
Inrush current time T_{h50}	200 μ s

Luminaire control gear data

Low flicker	Yes
Output current	117 mA


Photometrical data

Color temperature	3000 K
Luminous flux	1440 lm
Luminous efficacy	80 lm/W
Standard deviation of color matching	≤ 5 sdcn
Light color (designation)	Warm White
Color rendering index Ra	>80

Light technical data

Beam angle	120 °
------------	-------

Dimensions & weight



Diameter	350.0 mm
Height	115.0 mm
Product weight	600.00 g

Colors & materials

Body material	Steel
Product color	White
Housing color	White
Cover material	Polymethylmethacrylate (PMMA)

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
----------------------------------	--------------

Lifespan

Number of switching cycles	100000
Lifespan L70/B50 at 25 °C	30000 h
Lifespan L80/B10 at 25 °C	22000 h
Lifespan L90/B10 at 25 °C	15000 h

Additional product data

Mounting type	Surface
Mounting location	Ceiling / Wall

Capabilities

Dimmable	No
Type of connection	Screw terminal, 3-Pole
LED module replaceable	Not replaceable



Certificates & standards

Protection class IK (shock resistance)	IK03
Glow Wire Test according to IEC 695-2-1	650 °C
Photobiological safety group EN62778	RG 0
Protection class	I
Type of protection	IP44
Standards	CE/CB/TÜV SÜD/EAC/RoHS

Logistical data

Temperature range at storage	-25...+70 °C
------------------------------	--------------

Light Distribution

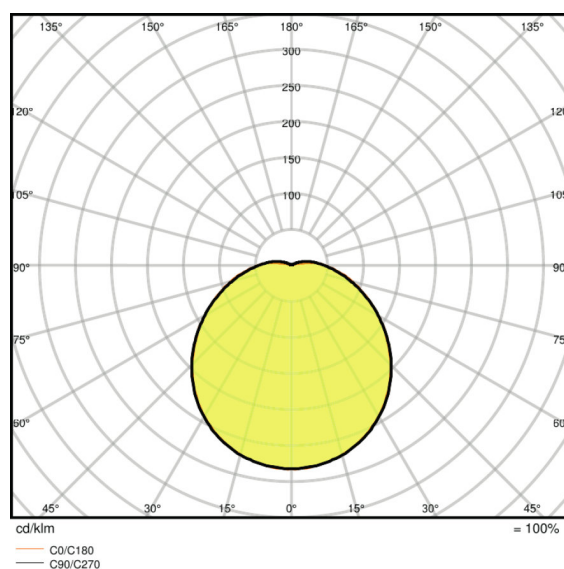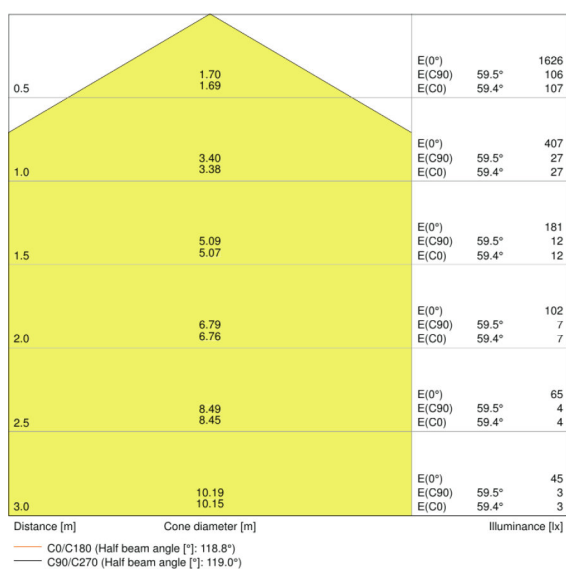

LDC typ cone

LDC typ polar

EQUIPMENT / ACCESSORIES


– Replacement cover optional available

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075080010	Folding carton box 1	386 mm x 386 mm x 120 mm	969.00 g	17.88 dm ³
4058075080027	Shipping carton box 5	625 mm x 410 mm x 410 mm	5862.00 g	105.06 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

- Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.