

---

## LUMINAIRE PHOTOMETRIC TEST REPORT

### 8778 CL KOS LED 10W, 4000K



#### Description Lines

---

Manufacturer:	NOWODVORSKI LIGHTING
Model name:	8778 CL KOS LED 10W,4000K
File name:	8778 CL KOS LED 10W,4000K.ltd
Date:	2019-12-18
Report number:	EF 18/12/2019/17
Diameter:	150mm
Height:	35mm
IP rating:	IP 44
Protection class:	II
Dimmable:	No

#### Equipment


---

Test system:	EVERFINE GO-2000B_V1 SYSTEM V2.00.417
Temperature:	25 +/-1 °C
Humidity:	65.0%
$\gamma$ interval:	1 deg
C interval:	10 deg
$\gamma$ range:	0-90 deg
Measurement distance:	6.56 m

## Photometric data

Total luminous flux:	880.997 lm
Color temperature:	3889 K
x:	0.3853
y:	0.3790
Color rendering index:	84.9
Wattage:	9.6014 W
U	230.69 V
I	0.0847 A
Power factor:	0.5
Luminous efficacy:	91.76 lm/W
Flux in lower hemisphere:	100.0%
Flux in upper hemisphere:	0.0%
Maximum luminous intensity:	341.3 cd
Light output ratio (LOR):	100.00%

Beam cone diagram  
Beam angle 100°

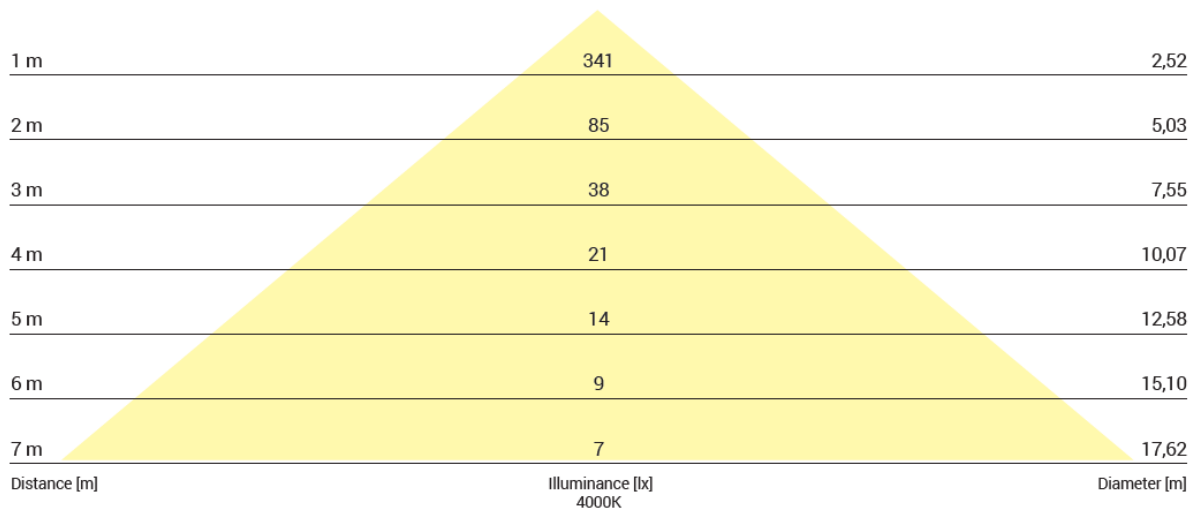


**Nowodvorski sp. j.**

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12


[www.nowodvorski.com](http://www.nowodvorski.com)

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

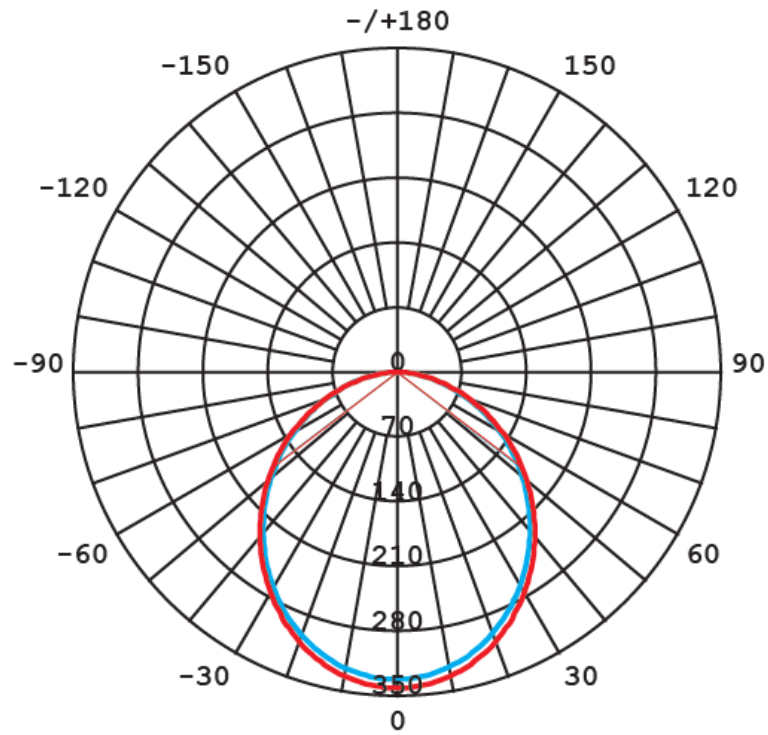

Luminous intensity [cd]  
 C0-C180 ————  
 C90-C270 ————

## Spectral distribution

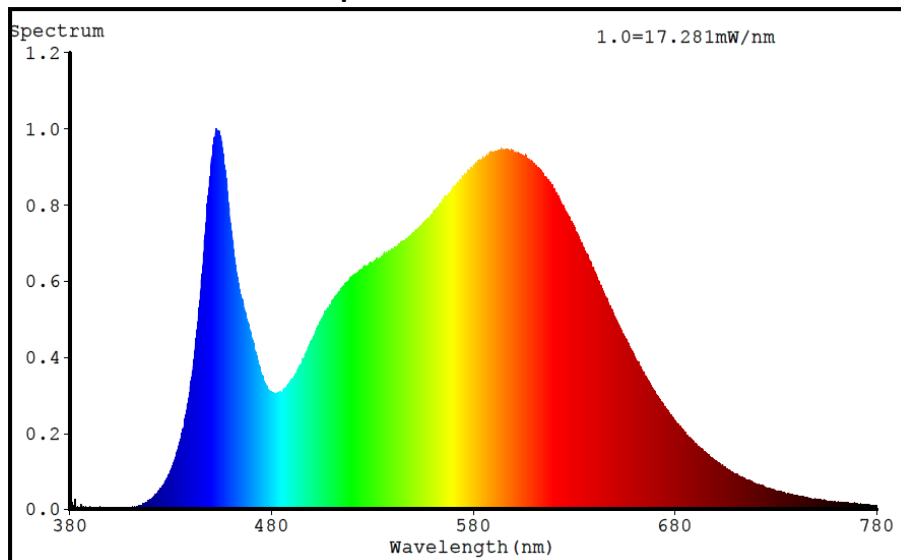

**Nowodvorski sp. j.**  
 ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208  
 Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12  
[www.nowodvorski.com](http://www.nowodvorski.com)