

02 Recessed Spots Fixed LED&gt;The COB IP54 Range

10107M/W/W



7W COB LED recessed spot with IP54.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.




## Downloads



## Dimensions



## Gallery

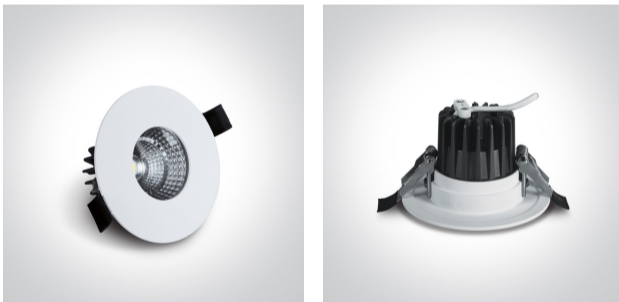

## Physical Specification

Item Group

02 Recessed Spots Fixed LED

Family

The COB IP54 Range

Order Code

10107M/W/W

Colour

White

Material

Die Cast

Shape



Circular


Height

62mm

Diameter	95mm
Cutout Hole Diameter	68mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	20,4V
Safety Class	
Power(Watts)	6,12W
IP Rating	IP54
Light Source	LED built in
LED Type	COB

LED Brand

Bridgelux

Завантажено з mamadecor.ua

LED Number

1

F Mark



## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

4,2-7,2W

Power Factor

0,8

Constant Current

Yes

300mA

14-24V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Cable

Brand

Lifud

Protection

0

## Illumination Data

Colour Temperature

3000K

Lumen Output

490lm

Light Efficiency

70lm/W

CRI

80

Beam Angle

40°

Illumination Diagram



Dark Light

Yes

## Packing Info

Pcs/Carton

50

Завантажено з [mamadecor.ua](http://mamadecor.ua)

Barcode

5291889071020

HS Code

9405409900

#### Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

