

06 Downlights Fixed LED>The IP54 Bathroom Downlights

10113B/W/W



13W LED recessed downlight, IP54. Suitable for bathroom installations.

Supplied with non-dimmable LED 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

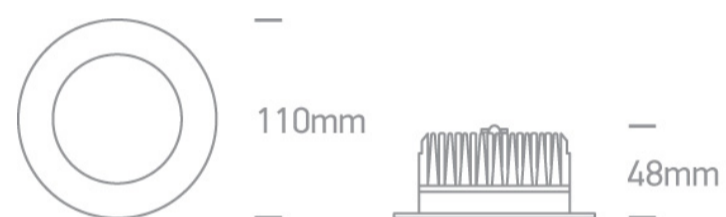

Gallery



Physical Specification

Item Group

06 Downlights Fixed LED

Family

The IP54 Bathroom Downlights

Order Code

10113B/W/W

Colour

White

Material

Die Cast

Diffuser Material



Plastic

Shape

Circular

Height	48mm
Diameter	110mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	13W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	36V
Safety Class	
Power(Watts)	10,8W
IP Rating	IP54
Light Source	LED built in

LED Type

SMD 2835

Завантажено з mamadecor.ua

LED Brand

Epistar

LED Number

27

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

9-12W

Power Factor

0,9

Constant Current

Yes

Output

300mA

Voltage Range

30-40V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

45°C

Operating Temp

85°C

Housing Material

Plastic

Output Terminal

Cable

Brand

0

Protection

Short Circuit and Overload

Illumination Data

Colour Temperature

3000K

Lumen Output

925lm

Light Efficiency

71,15lm/W

CRI

80

Beam Angle

90°



Packing Info

Box Length	11,5cm
Box Width	11,5cm
Box Height	9cm
Box Weight	0,316Kg
Pcs/Carton	24
Barcode	5291889043201
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Average Lifetime	40000hrs
Weee Directive	Yes

switch to
one light!

one
LIGHT

