

21 Industrial & Floodlights>The IP66 Industrial LED Range

38130LB/C

30W industrial linear light, IP66.

Complete with non-dimmable LED driver.

Supplied with 3 fixing clips.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

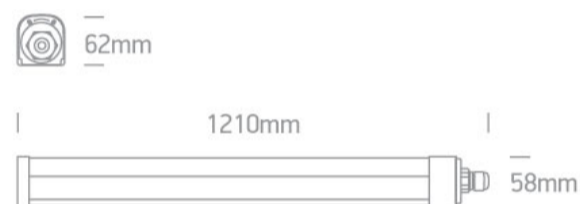

Gallery



Physical Specification

Item Group

21 Industrial & Floodlights

Family

The IP66 Industrial LED Range

Order Code

38130LB/C

Material

PC

Shape

Rectangular

Length

1210mm

Width

62mm

Height	58mm
Surface Ceiling	Yes
Surface Wall	Yes
Outdoor	Yes
IK Rating	8

Electrical Characteristics

Gear	Built In
------	----------

Fitting + Driver


Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP66
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Power(Watts)	30W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

Gear

Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	30W
Constant Current	Yes
Output	230mA
Voltage Range	91-130V
IP Rating	IP20
Safety Class	
Dimmable	No

Illumination Data

Colour Temperature	4000K
Lumen Output	3450lm
Light Efficiency	115lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	0.925kg
Pcs/Carton	12
Barcode	5291889074359
HS Code	9405114090

Energy Label



Energy Class

E

[Завантажено з mamadecor.ua](http://mamadecor.ua)

Energy Consumption

30KWh/1000h

Certification & Warranty

Warranty

2 years

switch to
one light!

one
LIGHT

