

07 Downlights Adjustable LED>The Box Type Shop Range

51138/W/C



38W COB LED Recessed adjustable downlight, shop range, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

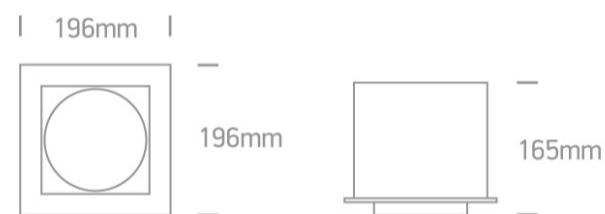

Gallery



Physical Specification

Item Group

07 Downlights Adjustable LED

Family

The Box Type Shop Range

Order Code

51138/W/C

Colour

White

Material

Die Cast

Shape



Rectangular

Length


196mm

Width	196mm
Height	165mm
Cutout Hole Width	170mm
Cutout Hole Length	170mm
Recessed Ceiling	Yes
Depth Required	200mm
Indoor	Yes
Adjustable	2 Directions


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	38W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	900mA
Voltage	42V
Safety Class	
Power(Watts)	37,8W
IP Rating	IP20
Light Source	LED built in

LED Type	COB
LED Brand	Cree
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	24,3-37,8W
Power Factor	0,9
Constant Current	Yes
900mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	70°C
Operating Temp	40°C
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	4000K
Lumen Output	2450lm
Light Efficiency	64,47lm/W
CRI	80
Beam Angle	38°
Illumination Diagram	

Packing Info

Box Length	23cm
------------	------

Box Width	20,5cm
Box Height	18cm
Box Weight	2kg
Pcs/Carton	8
Barcode	5291889035473
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

